## MEDIA 2.0 2P








## CABINA MULTIFUNZIONE ASIMMETRICA, APERTURA 1 ANTA SCORREVOLE E 1 FISSA IN LINEA CON 1 FISSO LATERALE



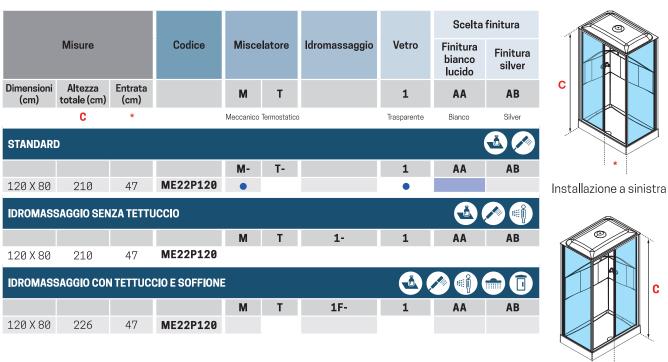








Costruzione

del codice

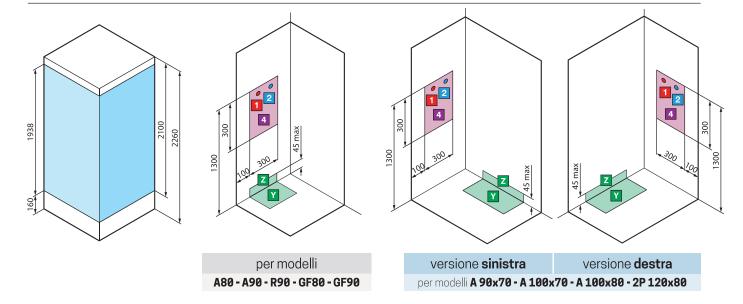





modello	A ± 5	B ± 5	С	D	Е
A80	804	804	200	404	300
A90	904	904	200	504	300
GF80	804	804	200	404	300
GF90	904	904	200	504	300



modello	A ± 5	B ± 5	С	D	Е
R90	904	904	200	504	300



modello	A ± 5	B ± 5	С	D	E
A90x70	904	704	200	504	300
A100x70	1004	704	200	604	300
A100x80	1004	804	200	604	300
2P120x80	1204	804	200	804	300



## CARATTERISTICHE IDRAULICHE:

Pressione dinamica ottimale 2÷5 bar Acqua calda 1/2" Acqua fredda 1/2" Allaccio sifone con raccordo ø 40 mm