

	SCHEDA TECNICA TECHNICAL SHEET	Date: 09/07/2018	Rev/0

Codice / Code: H89405	Descrizione / description: Braccio doccia girevole in ottone 1/2" MM con sistema di deviazione integrato, soffione OKI Ø 200 mm, doccia Zen, supporto fisso e flessibile doppia aggiratura cm 150 <i>Swivel brass arm 1/2" MM with integrated diverter system, OKI Ø 200 mm shower head, Zen hand shower, fixed bracket, double interlock brass hose cm 150</i>
--	--


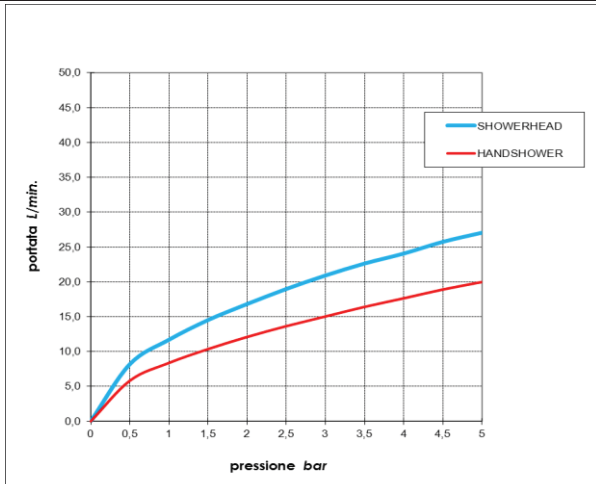
Foto / image 	Disegni / drawings
--	-------------------------------

Grafico di portata / Flow rate diagram																																									
<table border="1"> <thead> <tr> <th></th> <th style="background-color: #e0e0e0;">SHOWERHEAD</th> <th style="background-color: #e0e0e0;">HANDSHOWER</th> </tr> </thead> <tbody> <tr><td>0</td><td>0,0</td><td>0,0</td></tr> <tr><td>0,5</td><td>8,2</td><td>5,8</td></tr> <tr><td>1</td><td>11,7</td><td>8,4</td></tr> <tr><td>1,5</td><td>14,5</td><td>10,4</td></tr> <tr><td>2</td><td>16,8</td><td>12,1</td></tr> <tr><td>2,5</td><td>19,0</td><td>13,7</td></tr> <tr><td>3</td><td>20,9</td><td>15,0</td></tr> <tr><td>3,5</td><td>22,6</td><td>16,4</td></tr> <tr><td>4</td><td>24,1</td><td>17,7</td></tr> <tr><td>4,5</td><td>25,8</td><td>18,9</td></tr> <tr><td>5</td><td>27,1</td><td>20,0</td></tr> <tr> <td style="background-color: #e0e0e0;">pressione bar</td> <td style="background-color: #e0e0e0;">portata L/min</td> <td style="background-color: #e0e0e0;"></td> </tr> </tbody> </table>		SHOWERHEAD	HANDSHOWER	0	0,0	0,0	0,5	8,2	5,8	1	11,7	8,4	1,5	14,5	10,4	2	16,8	12,1	2,5	19,0	13,7	3	20,9	15,0	3,5	22,6	16,4	4	24,1	17,7	4,5	25,8	18,9	5	27,1	20,0	pressione bar	portata L/min			
	SHOWERHEAD	HANDSHOWER																																							
0	0,0	0,0																																							
0,5	8,2	5,8																																							
1	11,7	8,4																																							
1,5	14,5	10,4																																							
2	16,8	12,1																																							
2,5	19,0	13,7																																							
3	20,9	15,0																																							
3,5	22,6	16,4																																							
4	24,1	17,7																																							
4,5	25,8	18,9																																							
5	27,1	20,0																																							
pressione bar	portata L/min																																								

MATERIALI / materials

Braccio doccia H89000 e deviatore: Ottone; **Soffione I00405:** Acciaio inox, Plastica (POM), Ottone, Gomma (EPDM); **Doccia B00250:** Ottone, Plastica (ABS, POM, Nylon), Silicone; **Flessibile A03045:** Ottone, Gomma, PVC;

Swivel arm H89000 and diverter: Brass; **Shower head I00405:** Stainless Steel, Plastic (POM), Brass, Rubber (EPDM); **Handshower B00250:** Brass, Plastic (ABS, POM, Nylon), Silicone; **Hose A03045:** Brass, Rubber, PVC;

CARATTERISTICHE IDRAULICHE / hydraulic features			
	pressione <i>pressure</i>	portata <i>flow rate</i>	temperatura <i>temperature</i>
min	1 bar	/	/
max	5 bar	/	<70°C
consigliata <i>recommended</i>	2-3 bar	9L/min	/
<i>solo per miscelatori termostatici</i> <i>only for thermostatic mixers</i>			
		Blocco di sicurezza <i>safety lock</i>	/
		Temperatura acqua fredda <i>cold water temperature</i>	/
		Temperatura acqua calda <i>hot water temperature</i>	/

CERTIFICAZIONI / CERTIFICATIONS:
Handshower B00250, Showerhead I00405: ACS (France), CSA, IAPMO[ASME A112.18.1/CSA B125.1](CAN/USA), NF [EN 1112] (FRA), Watermark [AS/NZS 3662:2005] (AUS); **Hose A03045:** ACS (France), NF [EN 1113] (FRA);

CONFORMITA' / CONFORMITY:
 Chrome plating - EN 248