

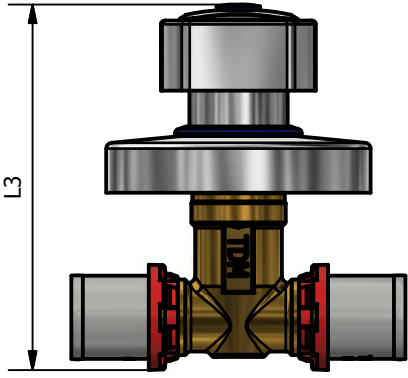
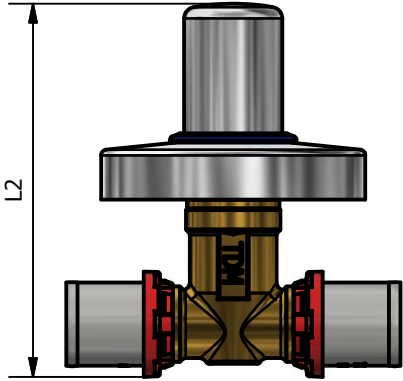
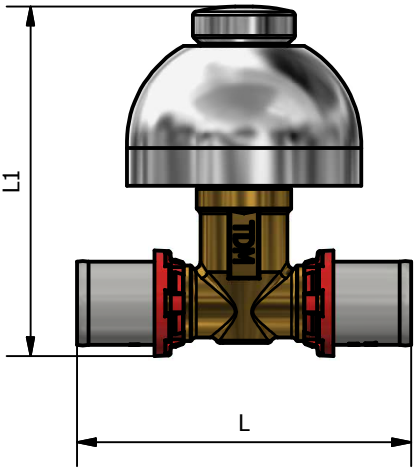


Codice Dianflex: 317-DT169V

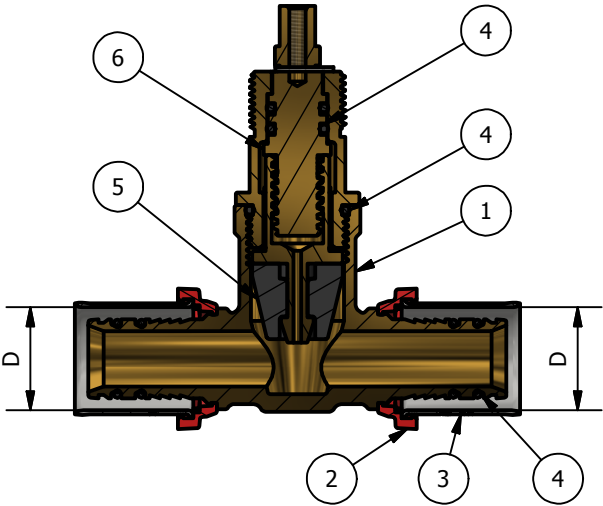

B-B (1 : 1.5)

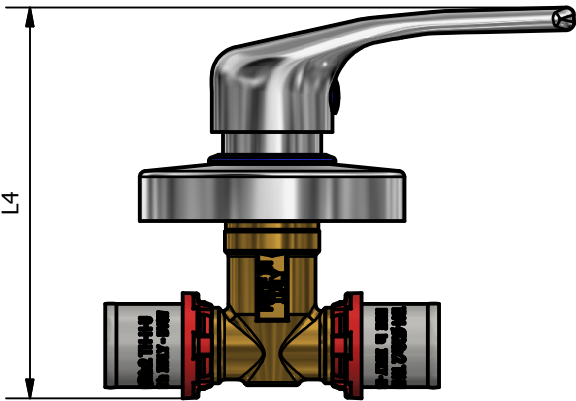

TDM CODE	SIZE	D	L	L1	L2	L3	L4
169V 16	16	16x2	90	91	97	95	101
169V 20	20	20x2	90	93	99	97	103
169V 26	26	26x3	100	106	112	110	116

N°	DESCRIPTION	MATERIAL
1	BODY	CW 617N EN 12165
2	INSULATION RING	NAYLON 6 (Red)
3	BUSH	AISI 304 EN 10088-2
4	O-RING	EPDM PEROX
5	RUBBER	NBR 70
6	SCREW	CW 617N EN12164

CONFORMITY
1) DM 37 del 06/04/2004
2) UNI EN 10954-2
3) UNI EN 1254-3
4) UNI EN 681-1

WORKING PRESSURE MAX	10 BAR
WORKING TEMPERATURE MIN- MAX	0°C / 90°C

01	AGGIORNAMENTO	Delaini M.	31/07/2019
00	Prima emissione	Delaini M.	24/08/2016
Rev.	Nota Revisione	Approvatore	Data Approvazione
Toll Gen:	JS13	Stato sup.:	Giallo Sabbiato
Filetto:	ISO 228	Note tecniche:	
Peso lavorato:	Peso grezzo:	N° stampo:	
Materiale:		Disegnatore:	Data: 24/08/2016

Codice: 169V scheda

Descrizione: Built in 2 ways valve with screw

