

1571

Teu F-M-F



Se adapteaza la orice tip de instalatii sanitare de uz casnic, la aplicatii comerciale, industriale si agricole, la sisteme de incalzire si sanitare si in general pentru orice fluid non-coroziv.

CARACTERISTICI TEHNICE

Temperatura maxima de functionare: 200 °C

Temperatura minima de lucru: - 20°C (cu conditia ca fluidul sa ramana in faza lichida)

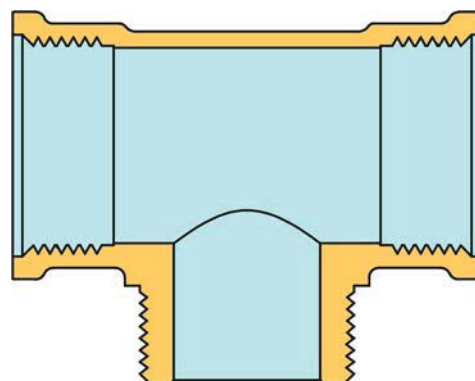
Presiune maxima de lucru: 30 bar

Filet: masculin UNI ISO 228

feminin UNI ISO 228

CARACTERISTICI DIN CONSTRUCȚIE

Corp : Alama CW617N

**MODELUL DIN FABRICĂ**

Art.	Codul		Tratament
1571	1500843	1/2"X1/2"X1/2"	-
	1500844	3/4"X3/4"X3/4"	-
	1500845	1"X1"X1"	-

CERTIFICATE**CERTIFICATE**