

# Codice Dianflex: 334-F377



## SPIGOT REDUCER

1352/24-001

PE100, SDR 11



PE100, SDR 11, Spigot Reducer for gas, water, mining and irrigation applications. All fittings are manufactured in virgin PE100 black polyethylene. The Fusion range of spigot fittings allows for complicated yet high performance pipeline systems.



### Product description:

Spigot Reducer. For gas, water, mining and irrigation applications. PE100, SDR 11, Water PN16, Gas 10 Bar. Temperature range on spigot fittings -10°C to +40°C (Welding temperature range -10°C to +40°C using Fusamatic electrofusion systems. For butt fusion jointing +5°C to +40°C).



### Design standards:

The Fusion Group of Companies have numerous local and international product approvals as well as ISO 9001 and ISO 29001 quality management system approvals.

Fusamatic branded spigot fittings are 3rd party certified against the product standards listed (other product certificates are available upon request). Note: Regional variations may apply to some of the standards referenced, please contact us for further details.

- 3rd party approved to EN 12201-3
- 3rd party approved to EN 1555-3
- 3rd party approved to ISO 4437-3
- 3rd party approved to ISO 4427-3

### Features:

- Fusamatic branded (unless stated)
- PE100 Black
- Water PN16 / Gas 10 Bar (Depending on PE pipe welded to and any local pipeline pressure regulations)
- SDR 11

### Accessories:

- Automatic Butt Fusion Machine
- Electrofusion Control Box
- Pipe Cutters
- Pipe Scrapers
- Pipe Alignment and Rerounding Clamps
- Generators
- Fusion Assist

### Comments:

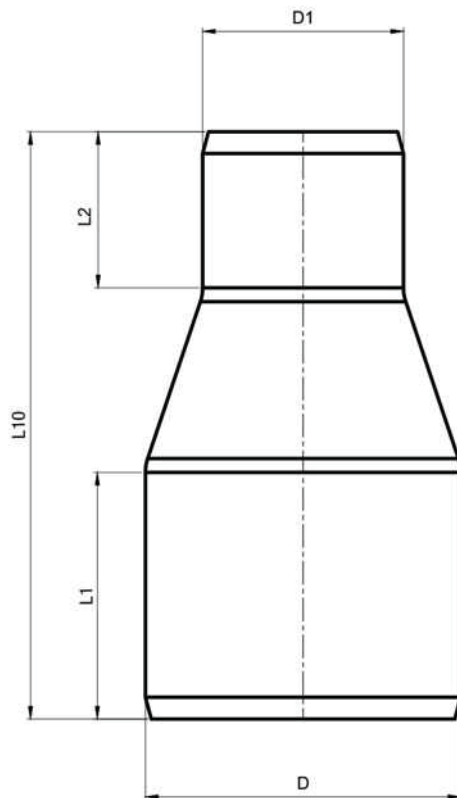
We reserve the right to supply non-Fusamatic branded spigot fittings dependent upon product availability.

Check that both pipe(s) and fitting to be joined are compatible, only compatible materials should be joined together. Check PN and SDR rating marked on fitting and compare with that of the pipe. If in doubt, seek advice from the manufacturer. Correct installation procedures should be followed.



**SPIGOT REDUCER****1352/24-001**

PE100, SDR 11

**Reference nos. and dimensions:**

Ref. No.	Fitting Size mm	D mm	D1 mm	L10 mm	L1 mm	L2 mm	Theoretical weight/kg
SPRHK75X50N	75X50	75	50	175	70	55	0.19