
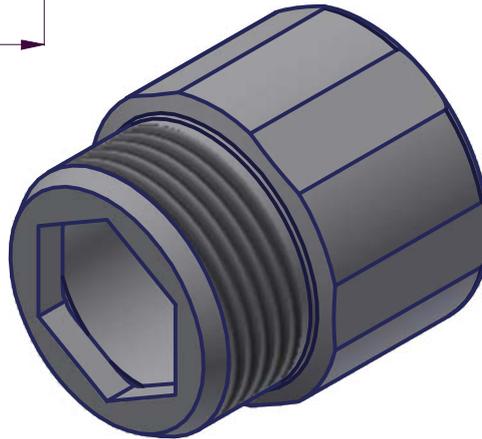
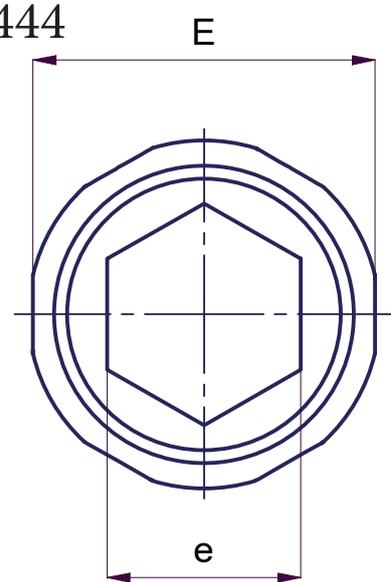


Codice Dianflex: 342-444

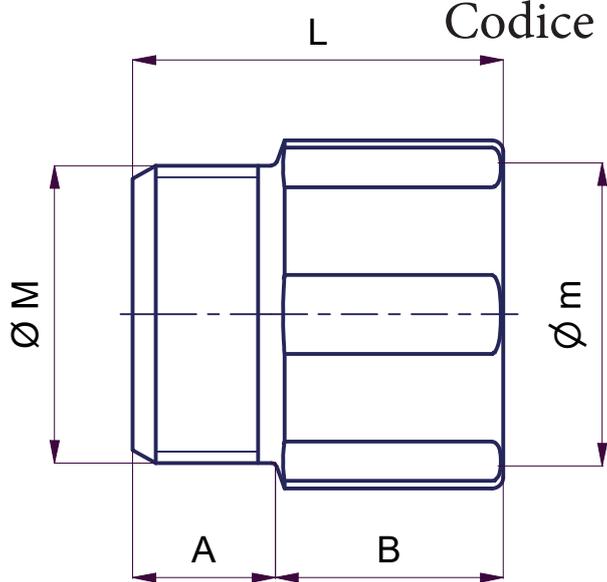

CODICE	DN		A mm(± 1)	B mm(± 1)	E mm(± 0,5)	e mm(± 0,5)	L mm(± 2)
	Ø M	Ø m					
52918	3/4"	3/4"	12,5	12	30	17	24,5
52919				15			27,5
52920				20			32,5
52921				25			37,5
52922				30			42,5
52923				35			47,5
52924				40			52,5
52925				50			62,5
52926				15			30
52927	20	35					
52928	1"	1"	15	25	38	19	40
52929				30			45
52930				40			55
52931				50			65
52932				1.1/4"			1.1/4"

Rev.	Descrizione Modifica		Data Modifica
Materiale 1: ACCIAIO C4C EN 10263	FILETTATURA UNI - ISO 228/1 CL.B	Trattamento: ZINC. ELETTROLITICA UNI ISO 2081:2018 SP. 6 ÷ 9 [µm]	
Utilizzo: ADATTO PER LA CONGIUNZIONE DI DUE TUBAZIONI.			
Caratteristiche: CONFORME ALLA DIRETTIVA RoHS2 2011/65/UE E AL TRASPORTO DI ACQUA POTABILE SECONDO DM 174 06-04-04.			
 <small>HYDRAULIC & FIXING SYSTEM</small>	Descrizione: MANICOTTO RIDOTTO M-F (PROLUNGA)		Autore: Fabrizio Tentori Data : 06/08/2008
			Disegno/Codice: 529-Z Foglio 1 di 1