


**CSP**

**Pompe sommergibili (acque sporche)**

**Caratteristiche:**

- Diam. Max part.: 35mm
- Max profondità: 5m
- Classe di isolamento: B

PERFORMANCE CHART AT n=2900 r/min

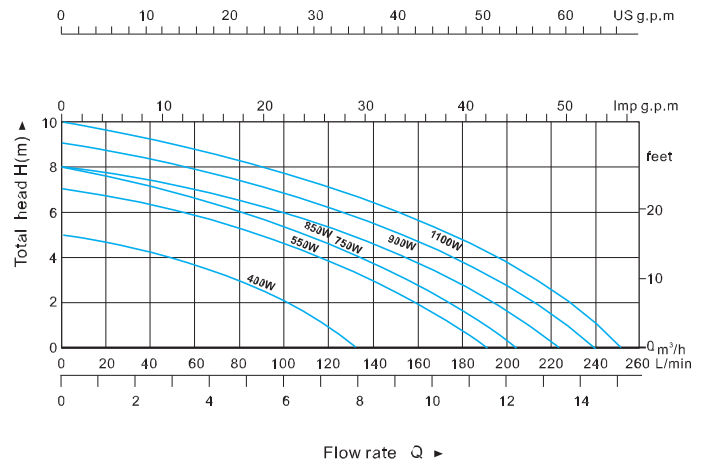

CSP-XX0PW



CSP-XX1PW

MODELLO	POWER (w)	FLUS. MAX (L/min)	Alt.zza max (m)	Diam. Tubo	CAVO	G.W (kg)	DIM. CARTONE/PZ (mm)	Q.Tà/20' GP (PZ)
356-CSP2-400PW	400	133	4.7	1", 1¼", 1½"	H05RN-F3G0.75mm <sup>2</sup>	20	460×350×400/4pcs	1850
356-CSP2-550PW	550	190	7		H05RN-F3G1.0mm <sup>2</sup>	20.5	460×350×400/4pcs	1850
356-CSP2-750PW	750	205	8		H07RN-F3G1.0mm <sup>2</sup>	21.5	460×350×400/4pcs	1850
356-CSP2-900PW	900	240	9		H07RN-F3G1.0mm <sup>2</sup>	22.5	460×340×360/4pcs	2150
356-CSP2-1101PW	1100	250	9.5		H07RN-F3G1.0mm <sup>2</sup>	23	460×340×360/4pcs	2150