


CSP

Pompe sommergibili (acque pulite)

Caratteristiche:

- Diam. Max part.: 5mm
- Max profondità: 8m
- Classe di isolamento: B

PERFORMANCE CHART AT n=2900 r/min

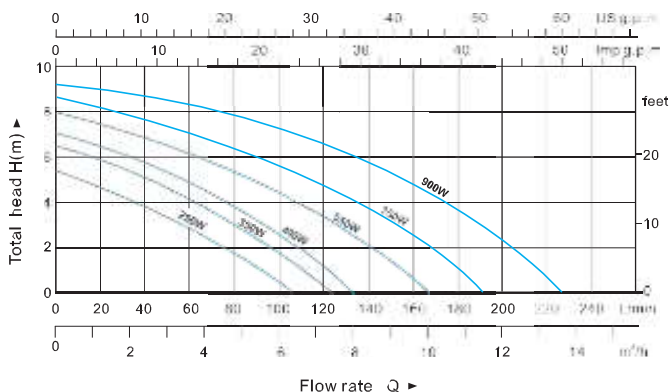

CSP-XX0S



CSP-XX1S



CSP-XX2S



CSP-XX3S

MODELLO	POWER (w)	FLUS.MAX (L/min)	Alt.zza max (m)	Diam. Tubo	CAVO	G.W (kg)	DIM. CARTONE/PZ (mm)	Q.Tà/20' GP (PZ)
356-CSP5-400S	400	135	7.0	1", 1¼", 1½"	H07RN-F3G1.0mm ²	21.5	460×340×360/4pcs	2000
356-CSP5-550S	550	165	8		H07RN-F3G1.0mm ²	22	460×340×360/4pcs	2400
356-CSP5-750S	750	195	8.5		H07RN-F3G1.0mm ²	22.5	460×340×360/4pcs	2400
356-CSP5-900S	900	225	9		H07RN-F3G1.0mm ²	23	460×340×360/4pcs	2400