


CSP

Pompe sommergibili (acque sporche)

Caratteristiche:

- Diam. Max part.: 35mm
- Max profondità : 5m
- Classe di isolamento: B

PERFORMANCE CHART AT n=2900 r/min

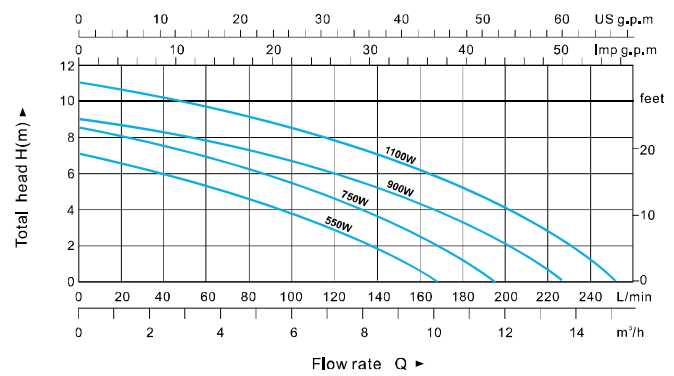

CSP-XX0SW



CSP-XX5SW



CSP-XX0PSW



CSP-XX2PSW

MODELLO	POWER (w)	FLUS. MAX (L/min)	Altezza Max (m)	Diam. Tubo	CAVO	G.W (kg)	DIM. CARTONE / PZ (mm)	Qtà/20' GP (PZ)
356-CSP6-0550SW	550	166	7	1", 1¼", 1½"	H05RN-F3G1.0mm ²	25	460x360x390/4pcs	1800
356-CSP6-0750SW	750	190	8,5		H07RN-F3G1.0mm ²	26	460x360x390/4pcs	1800
356-CSP6-0900SW	900	225	9		H07RN-F3G1.0mm ²	28	460x360x390/4pcs	1800
356-CSP6-1100SW	1100	250	11		H07RN-F3G1.0mm ²	31	460x360x390/4pcs	1800