

Codice Dianflex: 412-4294

INDUSTRIAL STANDARD




**B1 PG9
INDUSTRIAL
STANDARD**

Nero/Black/Schwarz

Grigio/Grey/Grau


CONNETTORI PER ELETTROVALVOLE
SOLENOID VALVE CONNECTORS
VENTILSTECKER

Attacco/Gland size/Verschraubung: **PG9**
Diametro cavo/Cable diameter/Kabeldurchmesser: 6 - 8 mm
2P + 1

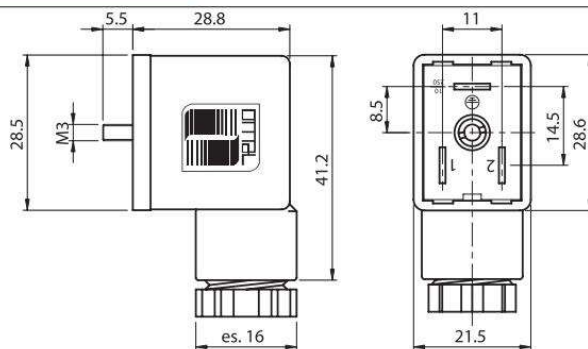

Corpo connettore Connector Stecker	PA 66 + 30% FV	Portata massima contatti Max. current Max. Strom	16 A	Grado di protezione Protection class Schutzart	IP65 EN 60529 (DIN 40050)
Contatti Contact material Kontaktmaterial	CuZn (Ag)	Portata nominale contatti: Operating current: Betriebsstrom:	10 A	Classe di isolamento Insulation class Isolierungsklasse	C - VDE 0110
Tensione nominale (max.) Max voltage Max. Spannung	250 V AC 300 V DC	Interasse Spacing: Abstand:	11 mm	Temperatura di funzionamento Working temperature Betriebstemperatur	-30 °C / +125 °C

Orientamento terra
Earth position
Erdrichtung



CODICI D'ORDINE
CODIFICATION
BESTELLSCHLÜSSEL

vedi pag.
see page
sieh Seite

2

INDUSTRIAL STANDARD




**B1T PG9
INDUSTRIAL
STANDARD**

CONNETTORI PER ELETTROVALVOLE
SOLENOID VALVE CONNECTORS
VENTILSTECKER
con componenti elettronici/with electronics/beschaltet

Attacco/Gland size/Verschraubung: **PG9**
Diametro cavo/Cable diameter/Kabeldurchmesser: 6 - 8 mm
2P + 1

Corpo connettore/Insert/Einsatz Scatole esterna trasparente/Transparent housing/Transparentes Gehäuse	PA 66 + 30% FV PA	Portata massima contatti Max. current Max. Strom	16 A	Grado di protezione Protection class Schutzart	IP65 EN 60529 (DIN 40050)
Contatti Contact material Kontaktmaterial	CuZn (Ag/Au)	Portata nominale contatti: Operating current: Betriebsstrom:	10 A	Classe di isolamento Insulation class Isolierungsklasse	C - VDE 0110
Tensione nominale (max.) Max voltage Max. Spannung	Secondo circuito According to circuitry nach Beschaltung	Interasse Spacing: Abstand:	11 mm	Temperatura di funzionamento Working temperature Betriebstemperatur	-25 °C / +90 °C

Orientamento terra
Earth position
Erdrichtung



CODICI D'ORDINE
CODIFICATION
BESTELLSCHLÜSSEL

vedi pag.
see page
sieh Seite

2

CIRCUITI
CIRCUITRY
BESCHALTUNG

vedi pag.
see page
sieh Seite

3