


BON GAS

VALVOLA A SFERA A PASSAGGIO TOTALE PER GAS COMBUSTIBILI
 FULL BORE BALL VALVE FOR FUEL GAS



SPECIFICA MATERIALI MATERIAL SPECIFICATION

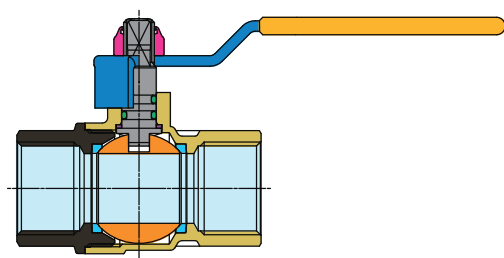

GUARDA IL VIDEO / WATCH THE VIDEO



PARTICOLARI COMPONENT

- CORPO
BODY
- MANICOTTO
END ADAPTER
- SFERA
BALL
- SEDI LATERALI
BALL GASKETS
- PERNO
STEM
- ANELLO ANTIFRIZIONE
THRUST WASHER
- O-RINGS
- LEVA
LEVER HANDLE
- FARFALLA O LEVA
LEVER OR T-HANDLE
- DADO AUTO-BLOCCANTE
SELF-LOCKING NUT

MATERIALI MATERIAL

- CW 617 N UNI EN 12165
- CW 617 N UNI EN 12165
- CW 614 N UNI EN 12164
- PTFE
- CW 614 N UNI EN 12164
- PTFE
- ELASTOMERO
Elastomer
- ACCIAIO ZINCATO
Zinc-Plated Steel
- ALLUMINIO
Aluminium
- ACCIAIO
Steel

DESCRIZIONE DESCRIPTION

- STAMPATO DA BARRA, NICHELATO
Forged, Nickel-Plated
- STAMPATO DA BARRA, NICHELATO
Forged, Nickel-Plated
- DA BARRA, NICHEL-CROMATA
Machined, Chrome-Plated
- VERGINE
Virgin
- DA BARRA
Machined
- VERGINE
Virgin
- ADATTO ALL'USO PER GAS
A NORMA EN549
Suitable For Use With Gas En549
- PLASTIFICATA IN PVC
Pvc Insulated
- VERNICIATA
Painted
- ZINCATO
Zinc-Plated

FILETTATURE

Estremità filettate UNI EN 10226 (BSPT a richiesta).

IMPIEGHI

Gas combustibili:
1° - 2° - 3° famiglia

Le valvole a sfera **BON GAS** sono anche adatte per l'uso con acqua calda e fredda, aria compressa, oli e idrocarburi in generale.

PRESSIONE DI ESERCIZIO

Per gas combustibili MOP5.
Per altri usi da PN 40 (1/2") a PN 25 (2").
Vedere diagramma pressione/temperatura.

LIMITI DI TEMPERATURA

Per gas combustibili da -20°C a +60°C.
Per altri usi da -20°C a +100°C.
Vedere diagramma pressione/temperatura.

END CONNECTIONS

Threaded ends to UNI EN 10226 (BSPT on request).

APPLICATIONS

Fuel gas:
1st - 2nd -3rd family

The **BON GAS** ball valves are also suitable for hot and cold water, compressed air, oils and hydrocarbons in general.

PRESSURE LIMITS

For fuel gas MOP5.
For other uses from PN 40 (1/2") to PN 25 (size 2").
See pressure/temperature diagram.

TEMPERATURE LIMITS

For fuel gas from -20°C to +60°C.
For other uses from -20°C to + 100°C.
See pressure/temperature diagram.

Diagramma pressione/temperatura (prova eseguita con acqua)
 Pressione/temperature diagram (tested with water)


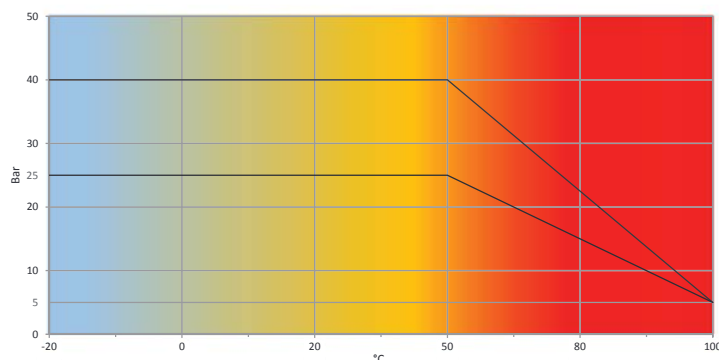



Diagramma perdite di carico (prova eseguita con acqua)
 Loss of head diagram (tested with water)



G0326 BON GAS

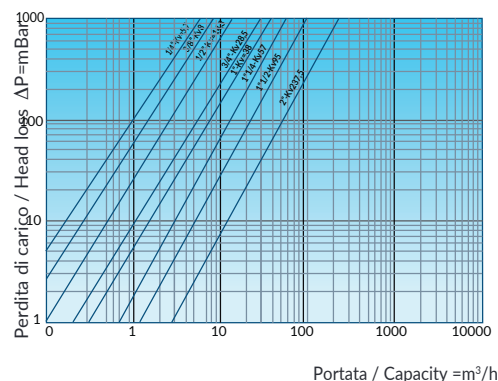

EN 331
(MOP5)



CODICE CODE	MISURA SIZE	PN Bar	A	B	C	øD	E	øD	øG	H	Box Crt
G0326N35	½"x ½" (DN15)	40	68,6	32	15	½"	44	10	½"	38,2	20/80
G0326N36	½"x ¾" (DN15)	40	66,9	32	15	¾"	44	10	½"	39,2	20/80
G0326N37	¾"x ¾" (DN20)	40	66,9	30,3	15	¾"	44	10	¾"	39,2	20/80

Rubinetto a sfera per gas combustibili a squadra maschio per scaldabagno,
con levetta in alluminio plastificata gialla, nichelato.
Angle ball cock for fuel gas, male/nut, with yellow plastic coated aluminium lever, nickel-plated.