



DS-OV03-01

Codice Dianflex: 433-S0463

DETENTORI

Lockshields

Serie Ovus

Detentori utilizzabili per la regolazione e l'intercettazione dei fluidi negli impianti di riscaldamento. Tutti i detentori sono dotati di codolo con autotenuta in gomma per facilitare l'installazione.

Lockshields for the regulation and interception of fluids in heating systems. All the lockshields are equipped with a tailpiece with rubber self-sealing to facilitate the installation.

Art. 0463

Detentori attacco per tubo rame e multistrato
Lockshields, connection for copper and multilayer tubes



Detentori a squadra
Angled lockshields



PRESTAZIONI

Fluidi d'impiego	Acqua, soluzioni glicolate
Percentuale di glicole max	30%
Max pressione d'esercizio	10 bar
Max Temp. d'esercizio	100°C

MATERIALI E CARATTERISTICHE TECNICHE

Corpo	Ottone stampato: CW617N UNI EN 12165
Calotta	
Componenti interni	Ottone trafilato: CW614N UNI EN 12164
Cappuccio detentore	
Elementi di tenuta	Gomma EPDM PEROX

PERFORMANCE

Employed fluids	Water, antifreeze solutions
Max. percentage of glycol	30%
Max working pressure	10 bar
Max working temperature	100°C


MATERIALS AND TECHNICAL FEATURES

Body	Pressed brass: CW617N UNI EN 12165
Nut	
Inside components	Extruded brass: CW614N UNI EN 12164
Lockshield cap	
Seal elements	EPDM PEROX rubber


Diagrammi Diagrams

0463

Detentori a squadra
Angled lockshields

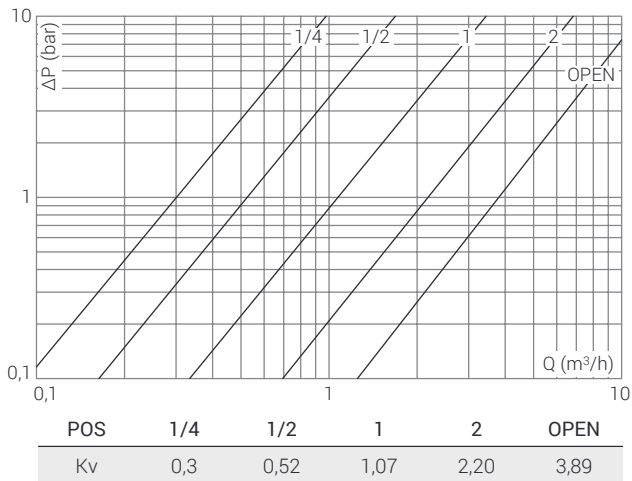

0463



G	F	H	A	L
1/2"	24x19*	61	23	55