

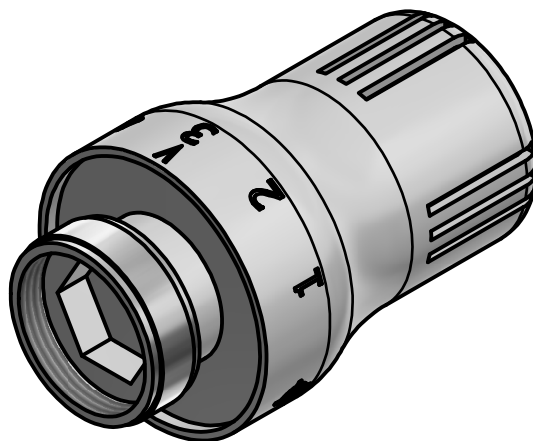


Codice Dianflex: 433-TD3015E

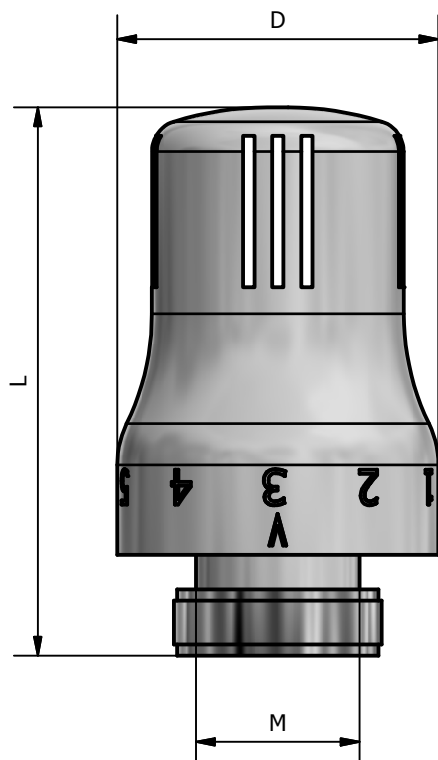

TDM CODE	M	D	L
TT 3015	M30x1,5	51	87
TT 3015 ECO	M30x1,5	42	75

0	*	1	2	3	4	5
CLOSED	7°C	12°C	16°C	20°C	24°C	28°C

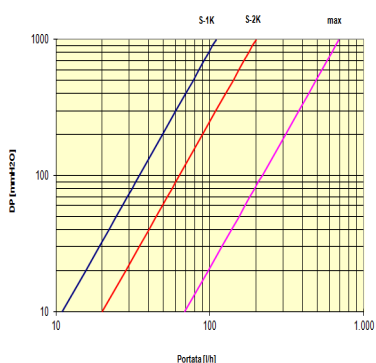

Specifiche-Specifications		
Isteresi	Hysteresis	(C) 0,55K
Press.max di esercizio	Max working pressure	10 bar
Pressione max differenziale	Max differential pressure	0,8 bar
Temperatura max del fluido	Max fluid temperature	110°C
Influenza della temperatura del fluido	Influence of the fluid temperature	(W) 0,65 K
Influenza della pressione differenziale	Influence of differential pressure	(D) 0,50 K
Tempo di risposta	Response time	(Z) 20 min
Portata nominale	Nominal flow rate	(qm N) 200 Kg/h

00	Prima emissione	Delaini M.	10/05/2016
Rev.	Nota Revisione	Approvatore	Data Approvazione
Toll Gen:	JS14	Stato sup.:	Liscio
Filetto:	ISO 262	Note tecniche:	
Peso lavorato:	Peso grezzo:	N° stampo:	
Materiale:		Codice: TT 3015-TT 3015 ECO	
ABS		Disegnatore:	Data: 10/05/2016
		Delaini P.	
		Descrizione: Testa termostatica con sensore a liquido	